

GoodWe Monitoring System

WiFi Automatic Matching via App




>>>Monitoring Website: www.goodwe-power.com
>>>EzViewer for iOS/Android



DT Series
Dual-MPPT, Three-Phase
10kW/12kW/15kW/17kW/20kW/25kW

Smart DT Series
Dual-MPPT, Three-Phase
4kW/5kW/6kW

"Double A"

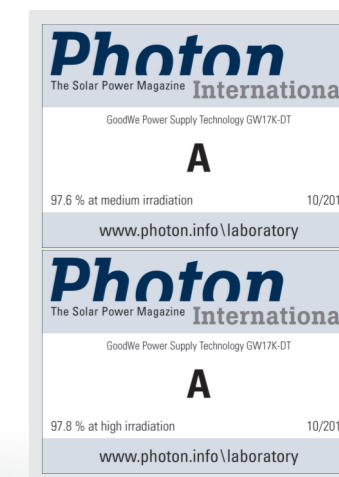

Innovatory WiFi Solution

Easier to operate & Quicker to react
—Online monitoring system and mobile Apps—



- Maximum Efficiency up to 98.2%
- European Efficiency up to 97.5%
- MPPT Efficiency over 99.5%
- DC switch
- IP65 dust-proof and water-proof rating
- 45°C full-load output
- Super large 5-inch LCD
- 30% lighter than similar products
- Multiple monitoring and communication
- up to 800 pieces can be integrated in one system

■ www.goodwe.com.cn ■ Global Service Hotline: +86 4009 281 333 ■ service@goodwe.com.cn

GoodWe (China)
No.189 Kunlunshan Rd.,SND,
Suzhou, 216163, China
T: +86 512 6239 6771
service@goodwe.com.cn
www.goodwe.com.cn

GoodWe (the Netherlands)
Zevenwouden 194,
3524 CX Utrecht, the Netherlands
T: +31 6 1988 6509/+31 6 1988 6512
service@goodwe.com.cn
www.goodwe.com.cn

GoodWe (Australia)
74 Tarana Avenue,
Glenroy VIC 3046, Australia
www.goodwe.com.cn

GoodWe(UK)
93 Caversham Place
Sutton Coldfield B73 6HW
www.goodwe.com.cn

WHERE THE SUN SHINES, THERE IS GOODWE!

Technical Data

	GW4000-DT	GW5000-DT	GW6000-DT
DC Input Data			
Max. DC power [W]	4200	5200	6200
Max. DC voltage [V]	1000	1000	1000
MPPT voltage range [V]	200~800	200~800	200~800
Starting voltage [V]	180	180	180
Max. DC current [A]	11/11	11/11	11/11
No. of DC connectors	2	2	2
No. of MPPTs	2 (can parallel)	2 (can parallel)	2 (can parallel)
DC connector	SUNCLIX / MC4 (optional)	SUNCLIX / MC4 (optional)	SUNCLIX / MC4 (optional)
AC Output Data			
Norminal AC power [W]	4000	5000	6000
Max. AC power [W]	4000	5000	6000
Max. AC current [A]	7	8.5	10
Norminal AC output	50/60Hz; 400Vac	50/60Hz; 400Vac	50/60Hz; 400Vac
AC output range	45~55Hz/55~65Hz; 310~480Vac	45~55Hz/55~65Hz; 310~480Vac	45~55Hz/55~65Hz; 310~480Vac
THDi	<1.5%	<1.5%	<1.5%
Power factor	0.9 leading~0.9 lagging	0.9 leading~0.9 lagging	0.9 leading~0.9 lagging
Grid connection	3W/N/PE	3W/N/PE	3W/N/PE
Efficiency			
Max. efficiency	97.8%	97.8%	97.8%
Euro efficiency	>96.7%	>96.7%	>96.7%
MPPT adaptation efficiency	99.9%	99.9%	99.9%
Protection			
Residual current monitoring unit	Integrated	Integrated	Integrated
Anti-islanding protection	Integrated	Integrated	Integrated
DC switch	Integrated (optional)	Integrated (optional)	Integrated (optional)
AC over current protection	Integrated	Integrated	Integrated
Insulation monitoring	Integrated	Integrated	Integrated
Certifications&Standards			
Grid regulation	VDE-AR-N 4105, AS4777.2/3, ERDF-NOI-RES_13E; VDE0126-1-1, EN50438 ,G83/2		
Safety	IEC62109-1&-2, AS3100		
EMC	EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 61000-3-2, EN 61000-3-3		
General Data			
Dimensions (WxHxD)	516*474*192mm	516*474*192mm	516*474*192mm
Weight [kg]	24	24	24
Mounting	Wall bracket	Wall bracket	Wall bracket
Ambient temperature range	-25~60°C (>45°C derating)	-25~60°C (>45°C derating)	-25~60°C (>45°C derating)
Relative humidity	0~95%	0~95%	0~95%
Max. operating altitude	2000m	2000m	2000m
Protection degree	IP65	IP65	IP65
Topology	Transformerless	Transformerless	Transformerless
Night power consumption [W]	<1	<1	<1
Cooling	Nature Convection	Nature Convection	Nature Convection
Noise emission [dB]	<30	<30	<30
Display	5.0" LCD	5.0" LCD	5.0" LCD
Communication	USB2.0; RS485 or WiFi	USB2.0; RS485 or WiFi	USB2.0; RS485 or WiFi
Standard warranty [years]	5/10/15/20/25 (optional)	5/10/15/20/25 (optional)	5/10/15/20/25 (optional)

Technical Data

	GW10K-DT	GW12K-DT	GW15K-DT	GW17K-DT	GW20K-DT	GW25K-DT
DC Input Data						
Max. DC power [W]	10200	12300	15400	17500	20500	25800
Max. DC voltage [V]	1000	1000	1000	1000	1000	1000
MPPT voltage range [V]	260~850	260~850	260~850	260~850	260~850	260~850
Starting voltage [V]	250	250	250	250	250	250
Max. DC current [A]	22/11	22/11	22/22	22/22	22/22	27/27
No. of DC connectors	4	4	6	6	6	6
No. of MPPTs	2	2	2 (can parallel)	2 (can parallel)	2 (can parallel)	2 (can parallel)
DC connector	SUNCLIX / MC4 (optional)					
AC Output Data						
Norminal AC power [W]	10000	12000	15000	17000	20000	25000
Max. AC power [W]	10000	12000	15000	17000	20000	25000
Max. AC current [A]	17	19	25	25	30	37
Norminal AC output	50/60Hz; 400Vac					
AC output range	45~55Hz/55~65Hz; 310~480Vac					
THDi	<1.5%					
Power factor	0.9 leading~0.9 lagging					
Grid connection	3W/N/PE					
Efficiency						
Max. efficiency	98.0%	98.0%	98.2%	98.2%	98.2%	98.2%
Euro efficiency	>97.5%	>97.5%	>97.5%	>97.5%	>97.5%	>97.5%
MPPT adaptation efficiency	99.9%	99.9%	99.9%	99.9%	99.9%	99.9%
Protection						
Residual current monitoring unit	Integrated					
Anti-islanding protection	Integrated					
DC switch	Integrated (optional)					
AC over current protection	Integrated					
Insulation monitoring	Integrated					
Certifications&Standards						
Grid regulation	VDE-AR-N 4105, AS4777.2/3, IEC61727, EN50438, G59/3, MEA&PEA, NRS097-2-1, ERDF-NOI-RES_13E	VDE-AR-N4105, AS4777.2/3, IEC61727, VDE0126-1-1, EN50438, NRS097-2-1, G59/3, ERDF-NOI-RES_13E;	AS4777.2/3, IEC61727, G59/3, EN50438	VDE-AR-N 4105, VDE0126-1-1, MEA&PEA, NRS097-2-1, ERDF-NOI-RES_13E	VDE-AR-N 4105, IEC61727, VDE0126-1-1, EN50438, G59/3	VDE-AR-N 4105, IEC61727, VDE0126-1-1, EN50438, G59/3
Safety	IEC62109-1&-2, AS3100					
EMC	EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 61000-3-11, EN 61000-3-12					
General Data						
Dimensions (WxHxD)	516*650*203mm					
Weight [kg]	39					41
Mounting	Wall bracket					
Ambient temperature range	-25~60°C (>45°C derating)					
Relative humidity	0~95%					
Max. operating altitude	2000m					
Protection degree	IP65					
Topology	Transformerless					
Night power consumption [W]	<1					
Cooling	Fan cooling					
Noise emission [dB]	<45					
Display	5.0" LCD					
Communication	USB2.0; RS485 or WiFi					
Standard warranty [years]	5/10/15/20/25 (optional)					